





Barbara




Fabric Needed

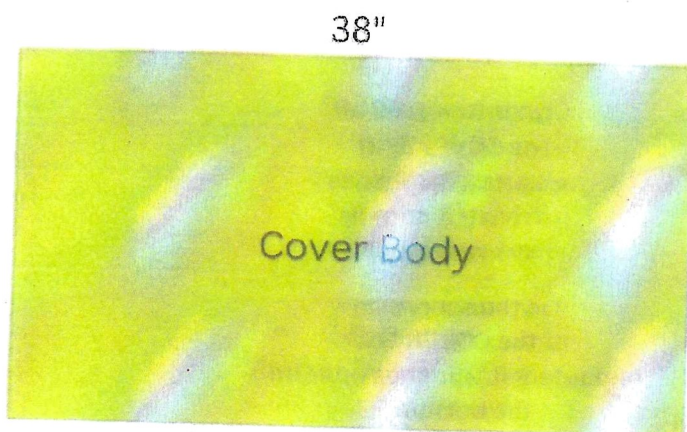

Handle
Hole Template
1 1/4" x 6"
Add marks to indicate
the center.




fusible
interfacing




Handle
lining

1

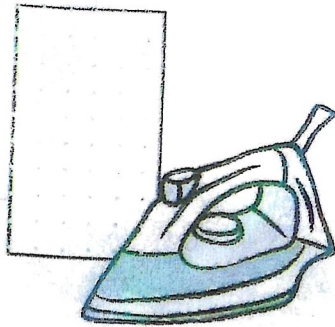

Iron interfacing to the wrong side of the handle hole lining.


Sew a zig zag stitch around the perimeter

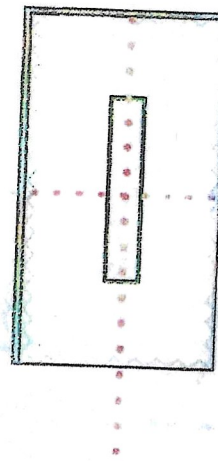

Lay the handle hole template in the center of the interfaced side of the handle hole lining piece.

Using a pencil draw around the template. Transfer all center marks to the lining/interfacing. Set aside.

2

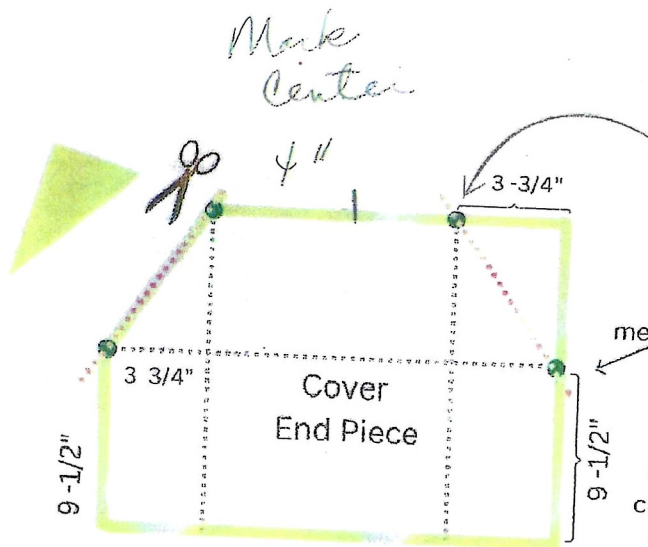


On the long side of the COVER END measure $3\frac{3}{4}$ inches in from the corner, mark with a pen

On the short side of the COVER END measure $9\frac{1}{2}$ inches up from the bottom, mark with a pen.

Using a pen, draw a line connecting the two marks. Repeat the same on the opposite side.

Cut along the pen line as shown.


3

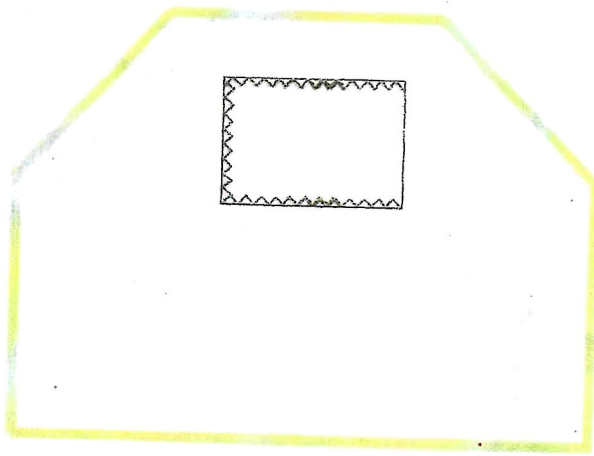

Tip:
Use painter's tape
to hold vinyl in place.
Remove as you sew.

Using a zig-zag stitch,
attach the vinyl pocket
(two inches from the top center)
to one of the End Pieces
by sewing along the
edge of the pocket on three sides.
Leave the right side of the clear
vinyl pocket open as shown in the
picture.



4

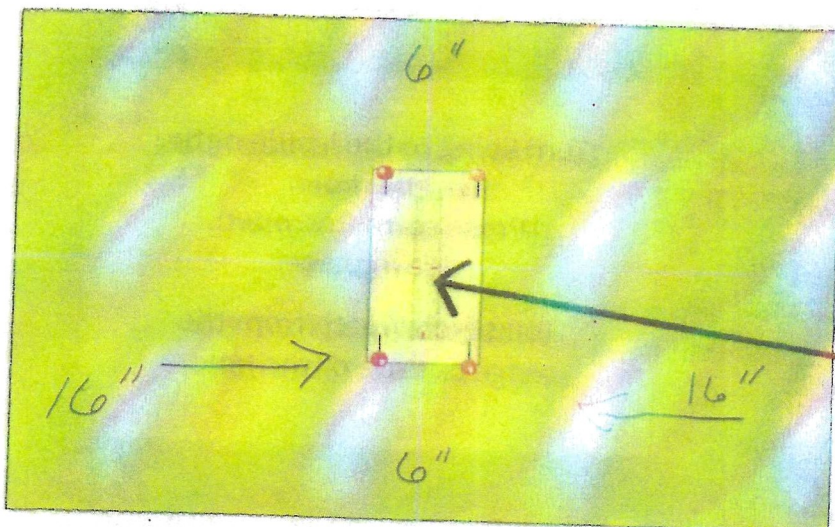

Locate the center of the
Cover Body.

With right sides together,
pin the handle **hole**
lining to the center of the
Cover Body as shown.
Sew on the
template line created earlier..


5

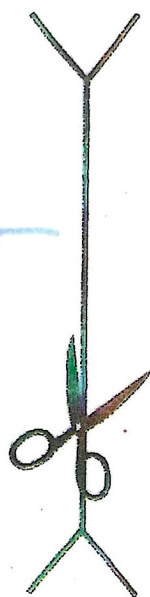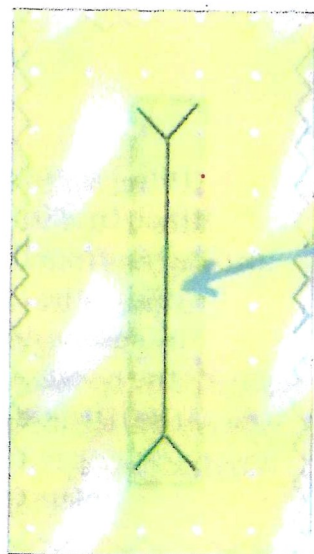

Cut a slit in the center of the handle hole as shown.

Cut in close to the corners without cutting through the stitch.

6

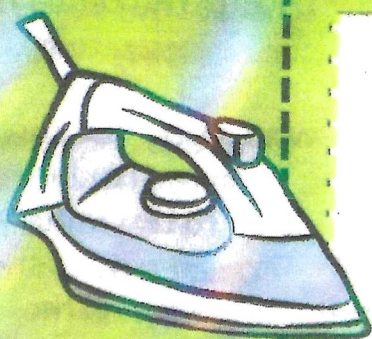

Turn lining to the inside of the handle hole.

Press seam-line open.

Pin in place.

Top stitch $\frac{1}{4}$ inch from the edge outside of the hole.


7

With right sides together clip an end piece to one long side of the carrier body.

Be sure to match up the centers of both.

Sew pieces together.

Repeat the same on the other end.


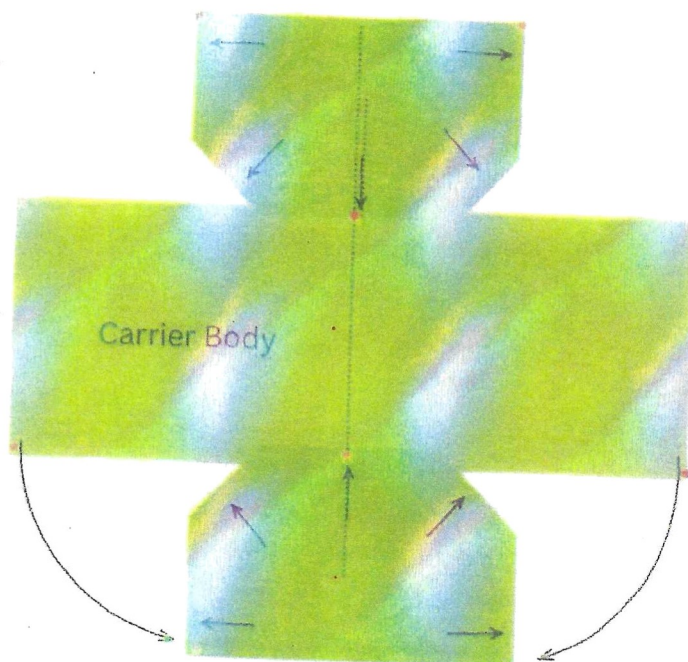


8

Trim up the bottom of the cover if needed.

Press $\frac{3}{8}$ inch under at the bottom,

Then fold and press again $\frac{3}{8}$ inch from the bottom creating a double fold..

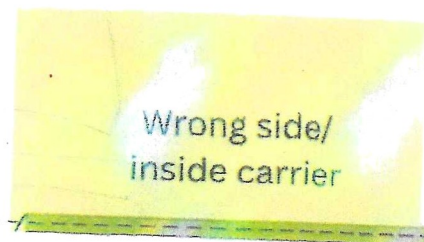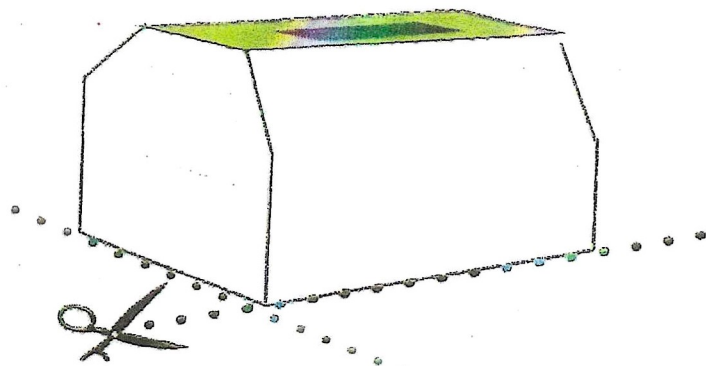

Top stitch over the double fold $\frac{1}{4}$ inch from the bottom sewing completely around the carrier bottom. Trim loose threads and press to finish

Barbara

15 x 22

